


PLAN VIEW

- SPECIFICATION:**
1. Concrete: Has a Design Strength of 5,000 psi at 28 Days.
 2. Steel Reinforcement: ASTM A-615, Grade 60 or ASTM A-497 Welded Wire Fabric.
 3. Loading: Designed for H₂O Loading.
 4. C.I. Casting: ASTM A48, Class 30/35.

- GENERAL NOTES:**
1. Unit Comes with Interior Inflow Piping Installed.
 2. Inflow Section of Unit Must be Filled with at Least 14 1/2" of Clear Water Prior to Use.

- FEATURES:**
- 4" Dia. P.V.C. Double Hub Inlet Furnished. Cast Iron Optional.
 - 4" Dia. P.V.C. Half Hub Outlet Furnished. Cast Iron Optional

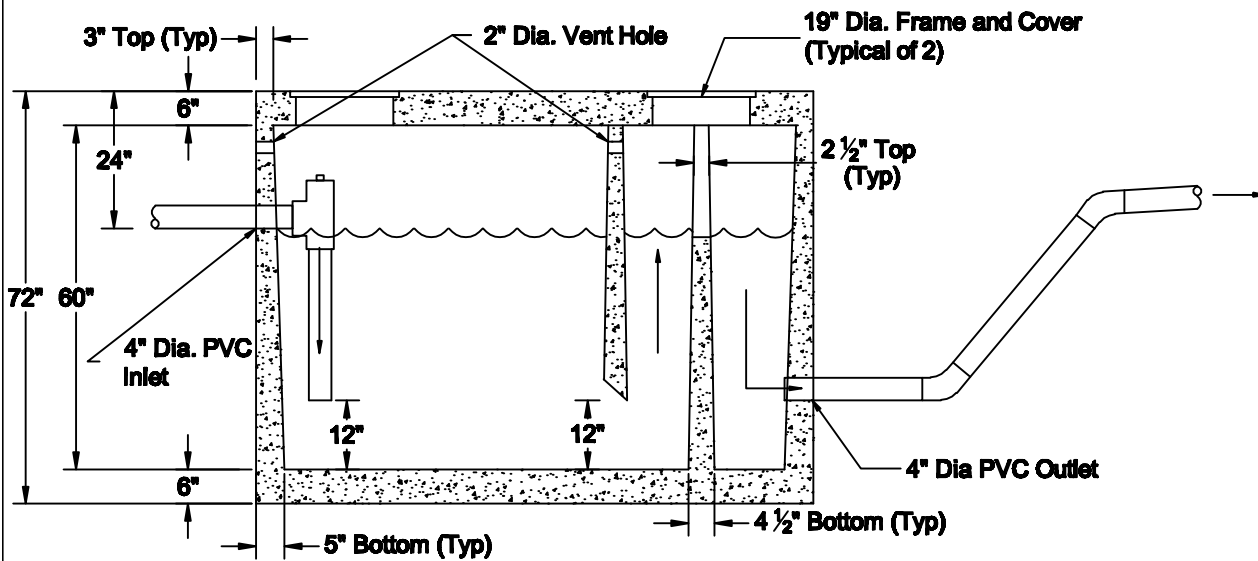

SECTION A-A

SCALE: NTS

SOUTHERN PRECAST CONCRETE
 PRODUCTS, INC.
 6868 FM 730 S. AZLE, TX 76020
 817.448.9718 PH
 817.448.9896 FX
 sw953@aol.com

SPCP-GT-1000

FILE NAME: 2009-1000GT

ISSUE DATE: MARCH 2009

**4'-7" x 91 1/4" x 5'-0" I.D.
 1000 Gallon
 Grease Trap**